



VENTILATION FITTING SYSTEMS MADE OF THERMOPLASTICS

for permanent application in exhaust air

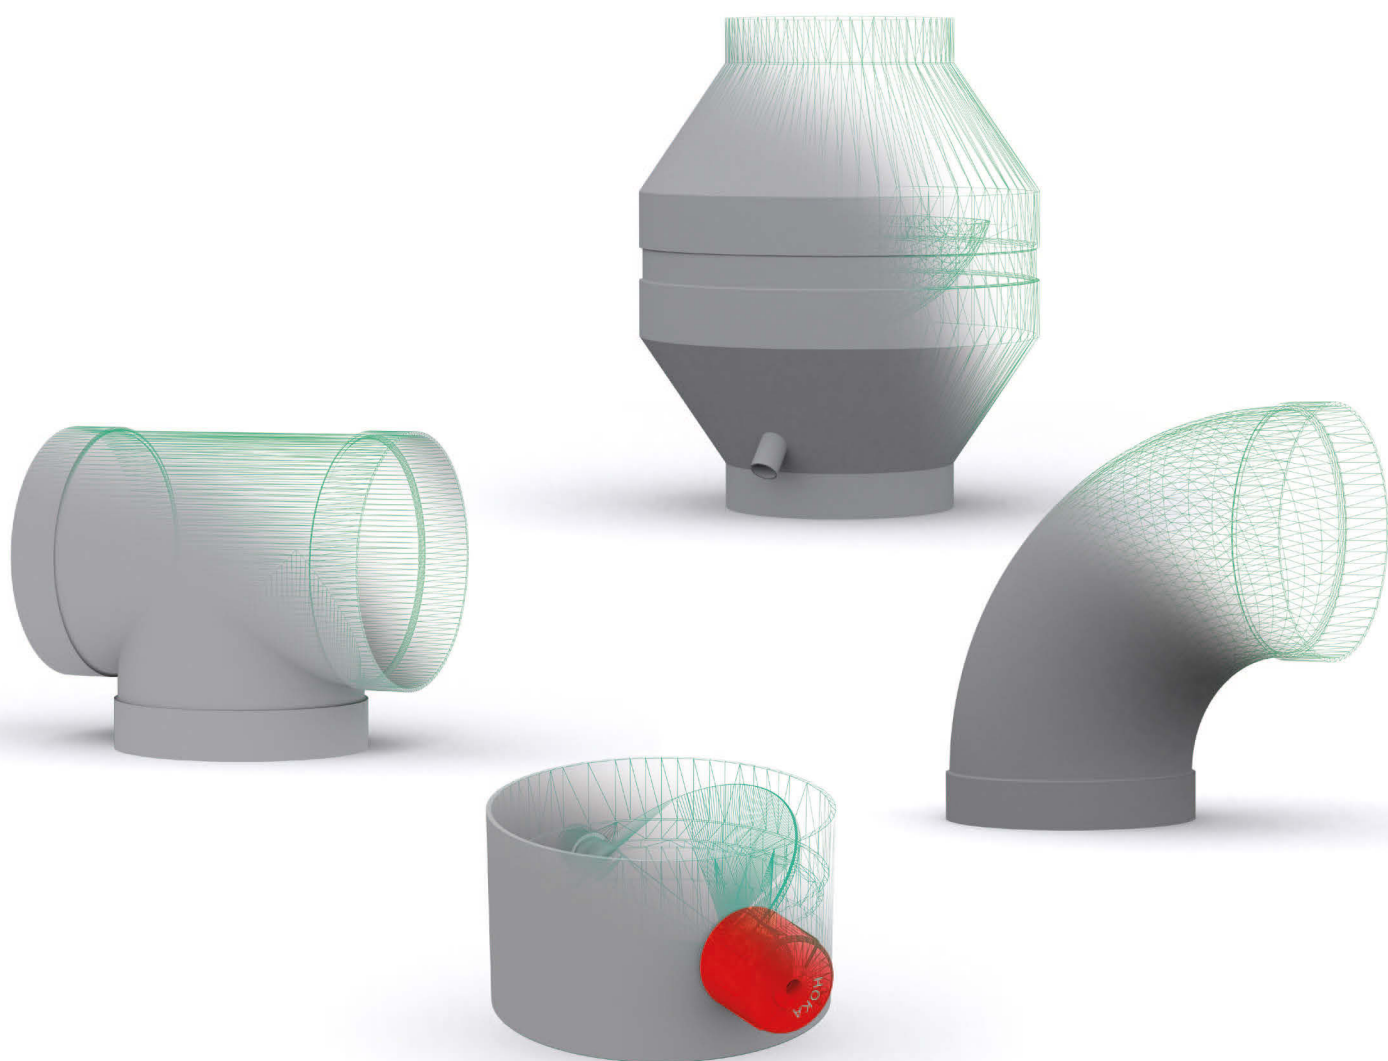

HOKA

PRE-MADE POLYMER VENTILATION DUCT ELIMINATE THE NEED FOR CUSTOMISED FAB




HoKa Bends



*HoKa Branch outlets
(T-Piece) 90°*



*HoKa Branch outlets
(T-Piece) 45°*




HoKa Double sockets




*HoKa Control valves
prepared for motor*




HoKa Flanges




HoKa Flexible connectors




*HoKa Sound attenuators
(reducer)*




HoKa Outlet cowls



HoKa Roof heads



HoKa Back flow dampers



HoKa Back flow dampers

HoKa Gesellschaft für Lüftungsformteile aus Kunststoffen mbH is a specialist manufacturer of moulded polymer ventilation duct fittings, which has been in operation for over 30 years.


HoKa fittings are produced in a large array of sizes with dimensions ranging from 50 to 1250 mm diameter. These plastic fittings are available in all commonly required

arrangements such as bends, junctions, joiners and transitions. This vast range virtually eliminates the need for custom fabrication.

HoKa fittings are manufactured using a controlled process that guarantees dimensional accuracy.

Each fitting is produced with joining collars on all openings to further simplify the assembly process.


& FITTINGS ICATION




HoKa Reducers



*HoKa Damper valves
with handle*



*HoKa Damper valves
with control knob*




*HoKa Damper valves
adjustable with locking knob*




*HoKa Condensers
deflector housing*




*HoKa Saddles
90° Outlet*



*HoKa Saddles
45° Outlet*



HoKa Breech 90° Outlets



HoKa Through walls



*HoKa Outlet with grilles
30° angled*



HoKa End caps



HoKa Cleaning orifices

Other dimensions and types of fittings can also be produced to meet individual requirements.

Produced in * PVC-U grey & white, PP-H, PPs, PE-HD, PP-EL-s and PVDF, HoKa plastic fittings are suitable for all exhaust and ventilation systems, including the extraction of corrosive and volatile fumes.

PVC-U duct and fittings can be joined by solvent welding whilst the joining of other materials (PP-H, PPs, PE-HD, PP-EL-s & PVDF) is done by a plastic welding process.

















Our aim is to ensure continuous availability and short delivery times on all HoKa products.

For sure you get free advice and consultation on the selection and use of HoKa duct and fittings.

A FITTING FOR EVERY JOB

TECHNICAL SPECIFICATIONS

EN . 10/2016





TO GET MORE TECHNICAL INFORMATION

YOU ARE WELCOME
TO REGISTER YOURSELF AT



Scan the QR code for more information
or look at <http://www.hoka.de>

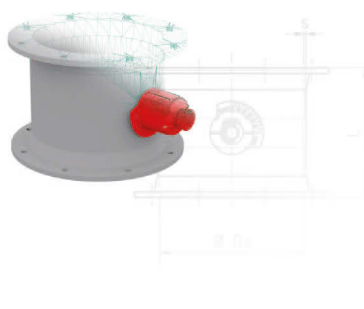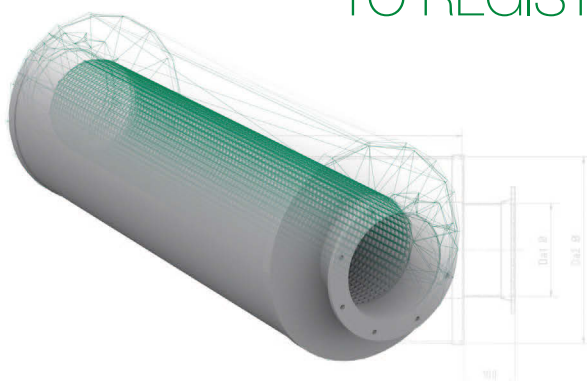

HoKa Gesellschaft für Lüftungsformteile aus Kunststoffen mbH

Reutherstrasse 12 . 53773 Hennef, Germany

Phone: +49 (0)2242 / 92 51 0 . Fax: +49 (0)2242 / 92 51 20

E-Mail: hoka@hoka.de . www.hoka.de

